

09/29/00

10-02-00

A

Please type a plus sign (+) inside this box

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PTO/SB/05 (4-98)

Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

042390.P9327

First Inventor or Application Identifier

Andrew J. Kuzma

Title

METHOD AND APPARATUS FOR SELECTING SERVER TO

Express Mail Label No.

EL466331162US

## APPLICATION ELEMENTS

See MPEP chapter 500 concerning utility patent application contents

ADDRESS TO:

 Assistant Commissioner for Patents  
 Box Patent Application  
 Washington, DC 20231

 JCS75 U.S. PTO  
 09/675756  
 09/29/00

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 26]  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 11]
4. Oath or Declaration [Total Pages 3]
- a. ☒ Newly executed (original copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d)  
(for continuation/divisional with Box 16 completed)
- i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 CFR §§ 1.63(d)(2) and 1.13(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO - 1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☐ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \*Small Entity Statement(s) ☐ Statement filed in prior application,  
Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other: .....

\*NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL  
ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R.  
§ 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED  
UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Prior application Information: Examiner

Group/Art Unit:

For CONTINUATION or DIVISIONAL APPS only. The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number of Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name

BLAKELY, SOKOLOFF, TAYLOR &amp; ZAFMAN LLP

Address

12400 Wilshire Boulevard, Seventh Floor

City

Los Angeles

State

California

Zip Code

90025

Country

U.S.A.

Telephone

(714) 557-3800

Fax

(714) 557-3347

Name (Print/Type)

William W. Schmal, Reg. No. 39,018

Signature

[Signature]

Date

09/28/00

Burden Hour Statement: This form is designed to take 15 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Please type a plus sign (+) inside this box ➔ +

Approved for use through 09/30/2000 OMB 0651-0032  
 Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE  
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.  
 Small Entity payments must be supported by a small entity statement,  
 otherwise large entity fees must be paid. See Forms PTO/SB-09-12.  
 See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$) 1,888.00

## Complete if Known

Application Number  
 Filing Date September 29, 2000  
 First Named Inventor Andrew J. Kuzma  
 Examiner Name  
 Group/Art Unit  
 Attorney Docket No. 042390.P9327

## METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees to  
☒ The Commissioner is hereby authorized to credit any over payments to

Deposit  
 Account  
 Number  
 Deposit  
 Account  
 Name

02-2666

Blakely, Sokoloff, Taylor & Zafman LLP

☒ Charge Any Additional Fees Required Under 37 CFR §§ 1.16, 1.17, 1.18 and 1.20

2. ☒ Payment Enclosed.  
☒ Check ☐ Money Order ☐ Other

## FEE CALCULATION

### 1. BASIC FILING FEE

Large Entity	Small Entity	Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Description	Fee Paid
101	690	201	345			Utility filing fee	\$690.00
106	310	206	155			Design filing fee	
107	480	207	240			Plant filing fee	
108	690	208	345			Reissue filing fee	
114	150	214	75			Provisional filing fee	
SUBTOTAL (1)							(\$)
							690.00

2. EXTRA CLAIM FEES	Extra Claims	Fee from below	Fee Paid
Total Claims	80	20 = 60 X	18.00 = \$1,080.00
Independent Claims	4	3 = 1 X	78.00 = \$78.00
Multiple Dependent			

\*or number previously paid, if greater. For Reissues, see below

Large Entity	Small Entity	Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Description
103	18	203	9			Claims in excess of 20
102	78	202	39			Independent claims in excess of 3
104	260	204	130			Multiple Dependent claim, if not paid
109	78	209	39			**Reissue independent claims over original patent
110	18	210	9			**Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 1,158.00

## FEE CALCULATION (continued)

3. ADDITIONAL FEE							
Large Entity		Small Entity				Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)				
105	130	205	65			Surcharge - late filing fee or oath	
127	50	227	25			Surcharge - late provisional filing fee or cover sheet.	
139	130	139	130			Non-English specification	
147	2,520	147	2,520			For filing a request for reexamination	
112	920*	112	920*			*Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*			*Requesting publication of SIR after Examiner action	
115	110	215	55			Extension for response within first month	
116	380	216	190			Extension for response within second month	
117	870	217	435			Extension for response within third month	
118	1,210	218	680			Extension for response within fourth month	
128	1,850	228	925			Extension for response within fifth month	
119	300	219	150			Notice of Appeal	
120	300	220	150			Filing a brief in support of an appeal	
121	260	221	130			Request for oral hearing	
138	1,510	138	1,510			Petition to institute a public use proceeding	
140	110	240	55			Petition to revive - unavoidable	
141	1,210	241	605			Petition to revive - unintentional	
142	1,210	242	605			Utility issue fee (or reissue)	
143	430	243	215			Design issue fee	
144	580	244	290			Plant issue fee	
122	130	122	130			Petitions to the Commissioner	
123	50	123	50			Petitions related to provisional applications	
126	240	126	240			Submission of Information Disclosure Stmt	
581	40	581	40			Recording each patent assignment per property (times number of properties)	40.00
146	790	246	395			Filing a submission after final rejection (37 CFR 1.129(a))	
149	790	249	395			For each additional invention to be examined (37 CFR 1.129(b))	
Other fee (specify) _____							
Other fee (specify) _____							
*Reduced by Basic Filing Fee Paid							
SUBTOTAL (3)							40.00

## SUBMITTED BY

Typed or Printed Name William W. Schaal

Signature

Date

09/28/00

## Complete (if applicable)

Reg. Number 39,018

Deposit Account User ID 02-2666

Burden Hour Statement: This form is guaranteed to take 27 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

UNITED STATES PATENT APPLICATION

FOR

METHOD AND APPARATUS FOR SELECTING SERVER TO DISTRIBUTE  
MULTIMEDIA DATA VIA A NETWORK

Inventor:

ANDREW J. KUZMA

Prepared by:

Blakely, Sokoloff, Taylor & Zafman LLP  
12400 Wilshire Blvd., Suite 700  
Los Angeles, California 90025  
(714) 557-3800

006260.95757660

## BACKGROUND

### 1. FIELD

This invention relates to multimedia data. In particular, the invention relates to distributing multimedia data.

### 2. GENERAL BACKGROUND

Techniques to provide delivery of multimedia data to the viewing audience is widely used by interactive multimedia services. A technique for transferring data such that it can be processed as a steady and continuously stream is called streaming. Streaming technology is becoming increasingly important with the growth of the

Internet because most of the viewing audience (e.g., users) do not have fast enough access to download large multimedia file quickly. In addition to limited bandwidth to transfer a complete file prior to viewing (which might take too long), streaming media players are intended for viewing-only, i.e., after viewing content, it is not stored on the user's computer.

The streaming technology is used by both residential and commercial sectors. Services available to the residential sector include video on demand for movies, news sports, television programs, home shopping, interactive games, surrogate travel, and a wide variety of educational and information services, to name a few. Services available to the commercial sector include video mail, conference records, multimedia manuals, training, and industry specific uses such as video footage of homes for sale used in the real estate industry and video footage of vacation resorts in the travel industry.

There is an increasing demand from the viewing audience to receive quality data packets embedded in multimedia streams. Currently, an internet protocol (IP) provides a means for data packets to be routed across underlying networks. The IP does this by providing both a destination address and a source address as part of the data packet sent on the network. With the current IP addressing and networking, it is not possible to fully determine where the viewing audience is with respect to the edge sites (servers) due to the facts that the IP address may be reassigned without regard to geographic or political boundaries. When the IP address is reassigned, the edge site that serves the viewing audience the multimedia streams may not be the best edge site to distribute the data because it may not be close in proximity with the viewer or viewing system. Also, when the IP address associating with an edge server is

reassigned, user may be directed to an edge site that is not the closest regional internet to the user. This is likely to result in reduced quality because the data stream has to pass through IP exchanges and a busy network link between the regional internets.

- 5 Therefore, there is a need to have a technique that provides quality delivery of multimedia streams to the viewing audience.

### BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the present invention will become apparent from the following detailed description of the present invention in which:

5 Figure 1A is a diagram illustrating a block diagram of a distributed media system according to one embodiment of the invention.

Figure 1B is a diagram illustrating a computer system in which one embodiment of the invention can be practiced.

Figure 1C is a diagram illustrating a block diagram of a distributed media system according to another embodiment of the invention.

10 Figure 2 is a diagram illustrating a block diagram of a server selector system according to one embodiment of the invention.

Figure 3 is a diagram illustrating a block diagram of the server selector system according to another embodiment of the invention.

15 Figure 4 is a diagram illustrating a block diagram of the server selector system according to yet another embodiment of the invention.

Figure 5 is a diagram illustrating a block diagram of the server selector system according to yet another embodiment of the invention.

Figure 6 is a flowchart illustrating a process to select an edge server according to one embodiment of the invention.

20 Figure 7 is a flowchart illustrating a process to select the edge server according to another embodiment of the invention.

Figure 8 is a flowchart illustrating a process to select the edge server according to yet another embodiment of the invention.

25 Figure 9 is a flowchart illustrating a process to select the edge server according to yet another embodiment of the invention.

### DETAILED DESCRIPTION

In the following description, for purposes of explanation, numerous details are set forth in order to provide a thorough understanding of the present invention.

However, it will be apparent to one skilled in the art that these specific details are not required in order to practice the present invention. In other instances, well-known electrical structures and circuits are shown in block diagram form in order not to obscure the present invention.

In the following description, terminology is used to discuss certain features of the present invention. For example, a "system" includes hardware equipment and/or software that process information. Examples of a system include, but are not limited or restricted to a computer (e.g., a desktop, a laptop, a hand-held, a server, a workstation, etc.), desktop office equipment (e.g., printer, scanner, a facsimile machine, etc.), a wireless telephone handset, a television set-top box, and the like. The term "information" is defined as one or more of data, address, and/or control. The term "server" or "sites" is used interchangeably and is defined as a computer that stores applications and information within a network for access by other computers (as opposed to one configured to interact directly with users and peripherals). The term "edge server" or "edge site" is used interchangeably and is defined as a server that is physically located close to it users designed to deliver faster, higher quality transmissions, typically in a local commercial Internet Service Provider (ISP) facility. The number of edge servers in a region depends on the number of users in the locale. The term "streaming" is defined as the delivery of a rich media event (audio or video) to an end user in real-time, that is, without the need for prior downloading of the content in its entirety. The user's sensory experience should be much like that of viewing television or listening to the radio.

Figure 1A is a diagram illustrating a distributed multimedia system according to one embodiment of the invention. The system 100A includes a network (internet or intranet) 110, viewing systems 120<sub>1</sub> to 120<sub>N</sub>, and regional data centers 130<sub>1</sub> to 130<sub>L</sub>. It is noted that the network system 110 may be a global internet network or a global intranet network.

The network system 110 operates within a network system such as Local Area Network (LANs) and Wide Area Networks (WANs). The networking system is build by internet network provider(s). The internet network providers typically built their

networks in smaller regional groupings and very often have distinct continental regions (e.g., North America, Europe, Asia, etc.). The reasons for the groupings include network management, cost factors of the WAN links between regions, deployment history, and local regulatory agencies.

5       The network system 110 connects millions of computers (e.g., viewing systems, regional data centers, edge sites, etc.) and may be divided into regional network systems<sub>140<sub>I</sub></sub> to <sub>140<sub>M</sub></sub>. Each regional network system (i.e., internet protocols) <sub>140<sub>I</sub></sub> to <sub>140<sub>M</sub></sub> includes edge servers or edge sites <sub>150<sub>I</sub></sub> to <sub>150<sub>P</sub></sub>. The edge servers <sub>150<sub>I</sub></sub> to <sub>150<sub>P</sub></sub> use the regional network systems <sub>140<sub>I</sub></sub> to <sub>140<sub>M</sub></sub> as means for routing data packets or  
10   content across the network system in the network system 110. The data packets or contents may be multimedia contents or data that are transferred via a streaming technique to generate multimedia stream. The edge servers <sub>150<sub>I</sub></sub> to <sub>150<sub>P</sub></sub> are connected to the viewing systems <sub>120<sub>I</sub></sub> to <sub>120<sub>N</sub></sub> to provide the viewing systems <sub>120<sub>I</sub></sub> to <sub>120<sub>N</sub></sub> with multimedia streaming data. The connections among the regional data centers <sub>130<sub>I</sub></sub> to <sub>130<sub>L</sub></sub>, or the connections between the regional data centers <sub>130<sub>I</sub></sub> to <sub>130<sub>L</sub></sub> with the edge  
15   servers <sub>150<sub>I</sub></sub> to <sub>150<sub>P</sub></sub>, or with the viewing systems <sub>120<sub>I</sub></sub> to <sub>120<sub>N</sub></sub>, may be private IP connections or public IP connections. Also, the regional data centers <sub>130<sub>I</sub></sub> to <sub>130<sub>L</sub></sub> are connected together in private or public IP connection. In other words, the connections in the distributed multimedia content system 100B are multiply-connected both  
20   through public IP peering exchanges and numerous private peering exchanges. The types of underlying connections vary from Dense Wavelength Division Multiplexing (WDM), to Asynchronous Transfer Mode (ATM), to Ethernet, to dial-up modems.

      The viewing systems <sub>120<sub>I</sub></sub> to <sub>120<sub>N</sub></sub> include computer systems and are sometimes called nodes in the network. The servers <sub>150<sub>I</sub></sub> to <sub>150<sub>P</sub></sub> are computers or devices that  
25   allocate resources for the network. There are several types of servers (e.g., file, print, network, and database). The file server is a computer and storage device dedicated to storing files. Any user in the network can store files on the server. A print server is a computer that manages one or more printers, and a network server is a computer that manages network traffic. A database server is a computer system that processes  
30   database queries. Servers are often dedicated, meaning that they perform no other tasks besides their server tasks. On multiprocessing operating systems, however, a single computer can execute several programs at once. A server in this case could refer to the program that is managing resources rather than the entire computer. For the purpose of



the illustrating the present invention, the server used is defined as an edge server from the plurality of servers 150<sub>1</sub> to 150<sub>P</sub> and is user as a tool to deliver or distribute the content to the viewing systems 120<sub>1</sub> to 120<sub>N</sub>.

- The viewing systems 120<sub>1</sub> to 120<sub>N</sub> may also obtain the multimedia streaming data directly from the regional data centers 130<sub>1</sub> to 130<sub>L</sub>. The viewing systems 120<sub>1</sub> to 120<sub>N</sub> are systems that receive the contents that are processed as a steady and continuous stream. For viewing systems who do not have fast enough access to download large multimedia file quickly, the streaming technology facilitates the interaction by displaying the data before the entire file has been transmitted. The viewing systems 120<sub>1</sub> to 120<sub>N</sub> receive the multimedia content from edge servers 150<sub>1</sub> to 150<sub>P</sub>. An application running on a viewing system processes the multimedia stream and converts it to sound or pictures. The viewing system 120 may save excess data in a buffer when it receives the data more quickly than required.

- Figure 1B is a diagram illustrating computer system 100B in which embodiment of the present invention can be practiced. The computer system 100B includes a processor 101, a host bus 111, a host bridge chipset 121, a system memory 132, a primary peripheral component interconnect (PCI) bus 151, PCI slots 161<sub>1</sub> to 161<sub>K</sub> ("K" ≥ 2), a PCI-to-industry standard architecture (ISA) bridge 172, mass storage device 173, Input/Output (I/O) ports 171, an ISA bus 182, and ISA slots 181<sub>1</sub> to 181<sub>Q</sub> ("Q" ≥ 2).

- The processor 101 represents a processing unit of any type of architecture. For example, the processor 101 may be implemented as a microcontroller, a digital signal processor, a state machine, or a central processing unit (CPU). The CPU may be implemented with a variety of architecture types such as complex instruction set computers (CISC), reduced instruction set computers (RISC), very long instruction word (VLIW), or hybrid architecture.

- The host bridge chipset 121 includes a number of interface circuits to allow the processor 101 access to the system memory 132 and the primary PCI bus 151. The system memory 132 represents one or more mechanisms for storing information. For example, the system memory 132 may include non-volatile or volatile memories. Examples of these memories include flash memory, read only memory (ROM), or random access memory (RAM). In the computer system 100B, the system memory 132 may contain a program that can implement the distributed media system and other

programs or data. In the computer system 100B, the system memory may contain a program that can implement selecting an edge server from the edge servers 150<sub>I</sub> to 150<sub>P</sub>. The program in the computer system 100B may be software program or firmware program. Of course, the system memory 132 preferably contains additional software (not shown), which is not necessary to understanding the invention.

The PCI slots 161<sub>I</sub> to 161<sub>K</sub> provide interfaces to PCI devices. Examples of PCI devices include the network interface and the media interface. The network interface connects to communication channel such as the Internet. The Internet provides access to on-line service providers, Web browsers, and other network channels. The media interface provides access to audio and video devices.

The PCI-to-ISA bridge 172 provides access to the ISA bus 182, mass storage devices 173, and input/output (I/O) ports 171. The I/O ports 171 provides interface to I/O devices (not shown). The I/O devices may include any I/O devices to perform I/O functions such as a media card (e.g., audio, video, graphics), a network card and the like. The mass storage device 173 includes a machine readable media such as a compact disk (CD) ROM, a digital video disk (DVD), floppy diskette, hard drive, and the like. The mass storage device 173 stores archive information such as code, programs, files, data, applications and operating systems. The mass storage device 173 provides a mechanism to read the machine-readable media.

When implemented in software, the elements of the present invention are the code segments to perform the necessary tasks. The program or code segments can be stored in a processor readable medium or transmitted by a computer data signal embodied in a carrier wave, or a signal modulated by a carrier, over a transmission medium. The "processor readable medium" may include any medium that can store or transfer information. Examples of the processor readable medium include an electronic circuit, a semiconductor memory device, a ROM, a flash memory, an erasable programmable ROM (EPROM), a floppy diskette, a CD-ROM, an optical disk, a hard disk, a fiber optical medium, a radio frequency (RF) link, etc. The computer data signal may include any signal that can propagate over a transmission medium such as electronic network channels, optical fibers, air, electromagnetic, RF links, etc. The code segments may be downloaded via computer networks such as the Internet, an Intranet, etc. The ISA bus 182 has a number of ISA slots 181<sub>I</sub> to 181<sub>M</sub> to interface to

ISA devices. Examples of ISA devices include data entry devices (e.g., keyboard, mouse, trackball, pointing device), printers, etc.

Computer system may install a software application (e.g., Web browser) which is used to locate and display Web pages. The software application used may be

- 5 Netscape Navigator or Microsoft Internet Explorer or any other commercial browsers. These software application display graphics, text as well as presentation of multimedia information including sound and video. The presentation of the multimedia information may require plug-ins for some formats.

- Figure 1C is a diagram illustrating a distributed multimedia system according to one embodiment of the present invention. The distributed multimedia system includes a computer system 162, a computer system 163, and a network system 110.

- The computer systems 162 and 163 may be the viewing system 120 and computer system for the interactive multimedia service, respectively and vice versa. Each system may be implemented as the computer system shown in Figure 1B. The computer system 163 may also be implemented in the regional data center 130. When the computer system 162 requests for the multimedia streams from the computer system 163, the computer system 162 accesses the network system 110. The computer system 163 transmits the multimedia streams to the computer system 162 via the server 150 in the network 110. Either computer system may include the server selector system 134 (shown in Figure 1B). If the server selector system 134 is implemented by programming code, the code is stored in the system memory 132 (shown in Figure 1B). Otherwise, the server selector system 134 is implemented by hardware in the computer system 162 or 163.

- When the invention is implemented by codes, it is implemented as a program (i.e., applet). This program may be designed to be executed from within another application. This program can be invoked from many different applications. For example, web browsers which is equipped with Java virtual machine, can interpret this program from web servers. In one embodiment, the program is executed from an applications installed in the computer system. In another embodiment, the program is executed from an application accessible from a browser.

Figure 2 illustrates a block diagram of the server selector system 134 according to one embodiment of the present invention. The server selector system 143 includes a receiver 210, a selector 215, a register 220, a receiver 225, and a transmitter 230.

5 The receiver 210 receives information from a viewing system from the plurality of viewing systems 120<sub>1</sub> to 120<sub>N</sub> and inputs the received information to the register 220. The received information may be information about server selected by the viewing system from a list of all available servers 150<sub>1</sub> to 150<sub>P</sub> in the network. The list obtained by the viewing system may be from printed materials, Web access, or the list is provided to viewing at the setup time of the viewing system. From the list, the viewer selects the servers of its choice and inputs the information to the receiver 210. The selector 215 selects an edge server based on the selected information from the receiver 210. The register 220 register the selected servers to a service provider. The information registered may be addresses of the selected servers. The service provider stores the addresses of the selected servers in a storage. The service provider manages the servers (including edge site servers) in the network. It is noted that there may be more than one selected servers.

15 When multimedia streams from the multimedia service is requested by the viewing system by the viewer, the service provider avail the addresses of the selected servers. The receiver 225 receives the multimedia data from the service provider and converts the multimedia data into a multimedia stream. The transmitter 230 couples to the receiver to transmit the multimedia streams to the viewing system through the selected servers.

20 In one embodiment, the distributed multimedia system is implement by codes or program. The codes or program, running on the viewer computer system, registers the selected servers with the service provider. The codes or program may be an application that is designed to execute directly from the operating system (OS) of the viewing computer system. The codes or program may be implemented in an applet form also.

25 The applet is designed to be executed from within an application installed in the viewing computer system. This applet is designed in ways that it can be invoked from many different applications. For example, web browsers that are equipped with Java virtual machines, can interpret the applet from the web server. The applet may have small files size, cross-platform compatible, and is highly secure (since it cannot be used to access viewer's hard drive). The applet is often used for small internet applications accessible from the web browser. The applet may be run on the viewing computer system or through a web application.

30

09675756.069000

The applet is designed to provide viewers with several alternatives when registering with the service provider. One alternative is that the applet registers with the service provider numerous servers in which the viewer specifies as a first choice, second choice, third choice, etc. Another alternative is that the applet may registers 5 different servers with different service providers under the direction of the viewer. For example, the viewer may direct the applet to register its first choice of a server with a service provider, and its second of another server with another service provider or the viewer may direct the applet to register its first choice and second within the same service provider. Yet, another alternative is that the applet is to register with a service 10 provider of the viewer's choice and a best-available server is chosen for the viewer when the viewer requests for a content (e.g., multimedia stream).

The applet provides that service provider with information that includes address and a unique identifier (ID). The unique ID may be a global viewer ID number, a Network Interface Card (NIC) serial number. The unique ID may also be provided by 15 the service provider and is provided back to the service provider when a multimedia stream is requested from the viewer. When registering with the service provider, the applet obtains a registration number from the service provider and stores it in the viewer computer system for later use.

When the viewer requests a multimedia stream, the registration number is 20 provided together with the request. From this registration number, a server is selected based on the registration number and the multimedia stream is transmitted to the viewer via the selected server. This selected server may be the one that the viewer specifically selected or it may be selected by the service provider based on the information obtains from the applet in the registering process. In this case, the best-available server is 25 selected to transmit the multimedia stream to the viewer. The best-available server may be the closest-available server, the least-busy server, or the server having the highest data rate, etc.

Figure 3 is a diagram illustrating the server selector system 134 according to another embodiment of the invention. The distributed media system 300 includes a 30 collector 310, an updater 315, a confirmer 320, a storage 325, a selector 330, a transmitter 335, a receiver 340, a checker 345, and a flag 350. Elements in the server selector system 134 may be implemented by hardware, software, or firmware or any by any combination thereof.

066260-95752960

The collector 310 collects information from the viewer. The information may be local information such as language preference, time zone. The information may also include the viewer location identified by the viewer address. Information collected by the collector 310 may be information regarding the addresses of the edge sites in the network. The addresses of the edge sites is updated by the updater 315 before the delivering of the addresses to the collector 310. The updating feature is available to provide future expansion and changes in the global internet environment. Future expansion may be caused by an expansion in the number of viewers, an expansion in geographic area, an expansion in the number of services and the like. Changes may be caused by law and regulations where the servers or the viewers are located, etc.

The checker 345 uses the information or the updated information about the network addresses of the edges site to check for the quality of the connection of the edge sites. The checker then generates a flag 350 to indicate whether the quality of the connections is good or not.

The confirmer 320 may be used to confirm whether the information regarding the viewer location is correct. If the viewer locations is not correct, the confirmer 320 corrects it and sends the correct location address to the collector 310. The collected information is stored in the storage 325.

The selector 330 retrieves the information in the storage 325 and makes the selection of the edge sites are to be used in the delivering of the multimedia data. The selection of the edge sites is based the local information or the edge site deployment or in combination thereof. The selector 330 selects a small number of possible candidate sites to be used in the delivering of the multimedia data.

When the viewer requests a multimedia stream, the selector 330 selects an edge site from the small number of possible sites that the selector 330 determines to be the best choice to deliver the multimedia stream.

The transmitter 335 and the receiver 340 perform the same functions as the transmitter 230 and receiver 225 respectively as shown in figure 2.

When the distributed media system 300 is implemented by codes or program such as an applet, the applet runs in the background of the viewers systems. The applet includes multiple modules correspond to the elements such as the collector 310, updater 315, etc., as discussed above. For example, the collector module 310 gathers local information such as language preference, time zone, and viewer information such as

location of the viewer. The confirmer module 320 may ask the viewer to confirm its location. The viewer may provide the collector module 310 additional information such as information about the viewer computer system, local regulations, and any information that would assist the selector module to select the best server for the viewer under a present circumstance. The collector module 310 is also provided with information about the network addresses of servers (e.g., edge sites), the information is stored in the storage module 524 and is retrieved to be inputted to the selector 330. The information regarding the edge servers may be updated to provide future expansion and changes. The checker module 345 uses the information about the edge server to make periodic checks for the connection quality to edge servers (e.g., sites). The selector module 330 uses, in combination or separate, the viewer information and servers deployment to select a number of candidate servers (sites) that are the potential servers for transmitting multimedia stream to viewer. When the viewer requests a multimedia stream, the selector module 330 selects a server that it believes to be the best choice for the viewer. The selector module 330 may be running in the viewing system or in the service provider system. In the dynamic environment (e.g., changes in information), the selector module dynamically determines which servers are best based on the obtained information from the viewer and the servers.

Figure 4 illustrates a block diagram of the server selector system 134 according to one embodiment of the present invention. Similarly to other embodiments, the elements in the system 400 may be implemented by hardware, software, and firmware alone or in combination thereof. For example, when implemented by software, the elements in the system 400 are represented by different modules corresponding to hardware elements in the hardware implementation.

The system 400 includes a receiver 410, a storage 415, a selector 420, a storage 425, a transmitter 430 and a receiver 435. The transmitter 430 and the receiver 435 perform same functions as the transmitter 230, receiver 225 respectively as shown in Figure 2.

In this embodiment, the viewer is prompted to provide information to the receiver 410 when requesting a multimedia stream. The information may be a geographic location information of the viewer. The information may then be stored in storage 415 and later retrieved from the storage 415 to be used in the edge servers selecting process. The selector 410 narrows the choice of edge sites and selects an edge

site to be used to deliver the multimedia streams to the viewer based on the retrieved information. When viewer requests the multimedia streams from the service, the transmitter 430 converts the multimedia data to the multimedia streams and transmits the streams via the selected edge site.

- 5           The server selector system 134 provides flexibility for mobile viewers who are accessing the service from many locations. Furthermore, the receiver 410 may receive information on the last several viewer location addresses and stores them in the storage 415. To make the selection more convenient, the viewer location address is retrieved accordingly by the depending the actual location of the viewer at the time to the request
- 10 for the multimedia streams. Based on this actual location address, the selector 420 can select the preferred edge site to deliver the multimedia stream.

- Additional information from the viewer may be provided to the service provider to help the service provider select the server that the service provider determines the best server for the viewer based on the information. In the case where the system 400
- 15 is implemented by codes such as an applet, the applet is running on its system. The service provider provides flexibility for mobile viewer who are accessing the service from many locations. The viewer machine may store the addresses of the last several geographic locations for future use. This makes the selection more convenient for both the viewer and the service provider. Often, this is used in the case where the viewer
- 20 travels between places (e.g., if the viewer travels between Germany and the United Kingdom).

- Figure 5 is a diagram illustrating a server selector system 134 according to one embodiment of the present invention. The system 500 include a receiver 510, a selector 515, a browser customizer 520, a storage 525, a transmitter 530, and a receiver 530.

- 25           The receiver 510 receives information such as viewer information (e.g., identification, location, interests, preferences, etc.), regulations, and business reasons. These information may restricts the list of preferred edge sites that can be used to deliver the multimedia stream. The selector 515 may select a list of preferred edge sites based on the received information and store it in the storage 525. The packager 530
- 30 packages the information into a text field called cookie to form a message. An installer installs the cookie in a customized browser in the viewer system. The message is sent back to the preferred server when the viewer requests the multimedia streams. The preferred server uses the information and transmits the multimedia streams to the



specific viewer accordingly. The function of the transmitter 530 and receiver 530 is the same as the transmitter 230 and receiver 225 respectively as shown in Figure 2.

The above embodiment may be implemented in hardware, firmware, or firmware or in any combination thereof. When implement in hardware, the above  
5 embodiment is described in terms of different device elements. When implement software (e.g., program) or firmware (codes), the embodiment is described in terms of different modules. It is also understood that the viewer may be directed to an edge site other than the one it prefers because of site unavailability, server loading, or network loading. The decision of the redirection is made by the viewers, by the service provider  
10 or by the service provider with guidance from the viewer and vice versa. Furthermore, any on the above embodiments may be used alone or in combination by the viewers or by the service providers

Figure 6 is a flowchart illustrating a process 600 to select an edge server according to one embodiment of the invention.

Upon START, the process 600 receives information regarding all the available edge servers (Block 610). The process 600 then selects the preferred edge servers and registers them with a service provider (Block 620). Next, the process 600 requests for multimedia streams from a multimedia service (Block 630). The multimedia service stores its multimedia data in a regional data center (Block 640). The process 600 then  
20 retrieves the multimedia data from the regional data center and converts it into multimedia stream (Block 650). Next, The process 600 transmits the multimedia stream through the selected edge servers in the network to the requested viewer (Block 640). The process 600 is then terminated.

Figure 7 is a flowchart illustrating a process 700 to select an edge server according to one embodiment of the invention.

Upon START, the process 700 gathers information. The information may be information on language reference, time zone, and viewer location (Block 710). Process 700 then confirm whether the viewer location is correct (Block 720). If it is not confirmed, the process 700 then ask for the correct viewer location (Block 730) and  
30 then the process 700 goes back to step in Block 710 and continues to the next step. Otherwise, the process 700 obtains information regarding network addresses of edge servers (Block 740). This information can be updated to provide future expansion and changes. This information also may be used to check for the quality of the connections

- to the servers. Next, the process 700 selects an edge site for the distributing of a multimedia stream using the information gathered in Block 710 and the information obtained in block 740 (Block 750). Then the process 700 requests for the multimedia stream to be distributed to the viewer (Block 760). The process 700 transmits the
- 5 multimedia stream to the viewer through the selected edge server (Block 770). Then the process 700 is terminated.

Figure 8 is a flowchart illustrating a process 800 to select a server for transmitting a multimedia stream.

- Upon START, the process 800 requests a multimedia stream (Block 810).
- 10 Then, the process provides a viewer geographic location (Block 820). Next, the process 800 selects a list of preferred edge servers in based on the provided information. (Block 830). The preferred edge servers may be listed in the first choice, second choice order. The process 800 then transmits the multimedia stream through the best available choice edge server (Block 840). Next, the process 800 stores the address
- 15 of the best available choice edge server in a storage (Block 850). The process 800 is then terminated.

Figure 9 is a flowchart illustrating a process 900 to select an edge server according to one embodiment of the invention.

- Upon START, the process 900 obtains a list of preferred edge sites (Block 910).
- 20 A service provider manages the edge sites. Next, the process 900 creates a customized browser that stores the preferences (Block 920). The preferences may be installed in the browser in text file as a cookie. The process 900 sends the cookie to the service provider when requests the multimedia stream (Block 930). The process 900 then transmits the multimedia stream to the viewer based on the information on the cookie
- 25 (Block 940). The process 900 is terminated.

- While this invention has been described with reference to illustrative embodiment, this description is not intended to be construed in a limiting sense. Various modifications of the illustrative embodiments, as well as other embodiments of the invention, which are apparent to persons skilled in the art to which the invention
- 30 pertains are deemed to lie within the spirit and scope of the invention.

CLAIMS

What is claimed is:

- 1           1.       A method comprising:  
2           receiving an information;  
3           selecting a server based on the received information; and  
4           transmitting a content from the selected server to a viewer via a network.
- 1           2.       The method of claim 1 wherein receiving an information comprises  
2           registering the information to a service.
- 1           3.       The method of claim 2 wherein the information comprises an address.
- 1           4.       The method of claim 3 wherein the information further comprises a  
2           unique identifier (ID).
- 1           5.       The method of claim 4 wherein the unique (ID) is one of a global user  
2           ID number, a network interface card (NIC) serial number, and a number provided by  
3           the service.
- 1           6.       The method of claim 2 further comprises receiving a registration number  
2           from the service, the registration number being provided by the viewer when requesting  
3           the content.
- 1           7.       The method of claim 1 wherein receiving the information comprises  
2           gathering one of a local information and a viewer location.
- 1           8.       The method of claim 7 further comprises confirming the viewer  
2           location.
- 1           9.       The method of claim 1 wherein the information comprises information  
2           on a plurality of addresses.

1           10.     The method of claim 9 wherein the plurality of addresses corresponds to  
2     a plurality of servers.

1           11.     The method of claim 1 further comprising updating the information.

1           12.     The method of claim 1 wherein the information is geographic  
2     information of the viewer.

1           13.     The method of 1 further comprising storing a server location at a viewer  
2     location.

1           14.     The method of claim 1 further comprising storing the information in a  
2     text file, the information being given to a browser by the server.

1           15.     The method of claim 14 further comprising sending the text file to the  
2     server when a page is requested from the server.

1           16.     The method of claim 14 wherein the text file is a cookie identifying a  
2     viewer.

1           17.     The method of claim 1 wherein the content comprises a multimedia  
2     information.

1           18.     The method of claim 1 wherein the network is one of a Local Area  
2     network (LAN) and a Wide Area Network (WAN).

1           19.     The method of claim 1 wherein the network is a network indicating a  
2     type of a connection.

1           20.    The method of claim 19 where the type is one of a Dense Wavelength  
2 Division Multiplexing (WDM), a Asynchronous Transfer Mode (ATM), an Ethernet,  
3 and a dial up modem.

1           21.    A computer program product comprising:  
2           a machine useable medium having computer program code embedded therein,  
3 the computer program product having:  
4           computer readable program code for receiving an information;  
5           computer readable program code for selecting a server based on the received  
6 information; and  
7           computer readable program code for transmitting a content from the selected  
8 server to a viewer via a network.

1           22.    The computer program product of claim 21 wherein computer readable  
2 program code for receiving an information comprises computer readable program code  
3 for registering the information to a service.

1           23.    The computer program product of claim 22 wherein the information  
2 comprises an address.

1           24.    The computer program product of claim 23 wherein the information  
2 further comprises a unique identifier (ID).

1           25.    The computer program product of claim 24 wherein the unique (ID) is  
2 one of a global user ID number, a network interface card (NIC) serial number, and a  
3 number provided by the service.

1           26.    The computer program product of claim 22 further comprises computer  
2 readable program code for receiving a registration number from the service, the  
3 registration number being provided by the viewer when requesting the content.

1           27.    The computer program product of claim 21 wherein receiving the  
2 information comprises computer readable program code for gathering one of a local  
3 information and a viewer location.

1           28.    The computer program product of claim 27 further comprises computer  
2 readable program code for confirming the viewer location.

1           29.    The computer program product of claim 21 wherein the information  
2 comprises information on a plurality of addresses.

1           30.    The computer program product of claim 29 wherein the plurality of  
2 addresses corresponds to a plurality of servers.

1           31.    The computer program product of claim 21 further comprising computer  
2 readable program code for updating the information.

1           32.    The computer program product of claim 21 wherein the information is  
2 geographic information of the viewer.

1           33.    The computer program product of 21 further comprising computer  
2 readable program code for storing a server location at a viewer location.

1           34.    The computer program product of claim 21 further comprising computer  
2 readable program code for storing the information in a text file, the information being  
3 given to a browser by the server.

1           35.    The computer program product of claim 34 further comprising computer  
2 readable program code for sending the text file to the server when a page is requested  
3 from the server.

1           36.     The computer program product of claim 34 wherein the text file is a  
2     cookie identifying a viewer.

1           37.     The computer program product of claim 31 wherein the content  
2     comprises a multimedia information.

1           38.     The computer program product of claim 31 wherein the network is one  
2     of a Local Area network (LAN) and a Wide Area Network (WAN).

1           39.     The computer program product of claim 31 wherein the network is a  
2     network indicating a type of a connection.

1           40.     The computer program product of claim 39 where the type is one of a  
2     Dense Wavelength Division Multiplexing (WDM), a Asynchronous Transfer Mode  
3     (ATM), an Ethernet, and a dial up modem.

1           41.     An apparatus comprising:  
2         a receiver to receive an information;  
3         a selector coupled to the receiver to select a server based on the received  
4     information; and  
5         a transmitter coupled to the selector to transmit a content from the selected  
6     server to a viewer via a network.

1           42.     The apparatus of claim 41 wherein the receiver comprises a register to  
2     register the information to a service.

1           43.     The apparatus of claim 42 wherein the information comprises an  
2     address.

1           44.     The apparatus of claim 43 wherein the information further comprises a  
2     unique identifier (ID).

1           45.    The apparatus of claim 44 wherein the unique (ID) is one of a global  
2   user ID number, a network interface card (NIC) serial number, and a number provided  
3   by the service.

1           46.    The apparatus of claim 42 wherein the registration number is provided  
2   by the viewer when requesting the content.

1           47.    The apparatus of claim 41 wherein the receiver gathers one of a local  
2   information and a viewer location.

1           48.    The apparatus of claim 47 further comprises a confirmer to confirm the  
2   viewer location.

1           49.    The apparatus of claim 41 wherein the information comprises  
2   information on a plurality of addresses.

1           50.    The apparatus of claim 49 wherein the plurality of addresses  
2   corresponds to a plurality of servers.

1           51.    The apparatus of claim 41 further comprising an updater to update the  
2   information.

1           52.    The apparatus of claim 41 wherein the information is geographic  
2   information of the viewer.

1           53.    The apparatus of 41 further comprising a storage to store a server  
2   location at a viewer location.

1           54.    The apparatus of claim 41 wherein the stored the information is stored in  
2   a text file, the information being given to a browser by the server.



1           55.     The apparatus of claim 54 further comprising sender to send the text file  
2     to the server when a page is requested from the server.

1           56.     The apparatus of claim 54 wherein the text file is a cookie identifying a  
2     viewer.

1           57.     The apparatus of claim 41 wherein the content comprises a multimedia  
2     information.

1           58.     The apparatus of claim 41 wherein the network is one of a Local Area  
2     network (LAN) and a Wide Area Network (WAN).

1           59.     The apparatus of claim 41 wherein the network is a network indicating a  
2     type of a connection.

1           60.     The apparatus of claim 59 where the type is one of a Dense Wavelength  
2     Division Multiplexing (WDM), a Asynchronous Transfer Mode (ATM), an Ethernet,  
3     and a dial up modem.

1           61.     A system comprising:  
2         a first computer;  
3         a network coupled to the first computer to provide access to the network; and  
4         a second computer coupled to the network to access the network, the second  
5     computer comprising:  
6         a receiver to receive an information,  
7         a selector coupled to the receiver to select a server based on the received  
8     information, and  
9         a transmitter coupled to the selector to transmit a content from the  
10     selected server to a viewer via a network.

1           62.    The system of claim 61 wherein the receiver comprises a register to  
2   register the information to a service.

1           63.    The system of claim 62 wherein the information comprises an address.

1           64.    The system of claim 63 wherein the information further comprises a  
2   unique identifier (ID).

1           65.    The system of claim 64 wherein the unique (ID) is one of a global user  
2   ID number, a network interface card (NIC) serial number, and a number provided by  
3   the service.

1           66.    The system of claim 62 wherein the registration number is provided by  
2   the viewer when requesting the content.

1           67.    The system of claim 61 wherein the receiver gathers one of a local  
2   information and a viewer location.

1           68.    The system of claim 67 further comprises a confirmer to confirm the  
2   viewer location.

1           69.    The system of claim 61 wherein the information comprises information  
2   on a plurality of addresses.

1           70.    The system of claim 69 wherein the plurality of addresses corresponds  
2   to a plurality of servers.

1           71.    The system of claim 61 further comprising an updater to update the  
2   information.

1           72.     The system of claim 61 wherein the information is geographic  
2     information of the viewer.

1           73.     The system of 61 further comprising a storage to store a server location  
2     at a viewer location.

1           74.     The system of claim 61 wherein the stored the information is stored in a  
2     text file, the information being given to a browser by the server.

1           75.     The system of claim 74 further comprising sender to send the text file to  
2     the server when a page is requested from the server.

1           76.     The system of claim 74 wherein the text file is a cookie identifying a  
2     viewer.

1           77.     The system of claim 61 wherein the content comprises a multimedia  
2     information.

1           78.     The system of claim 61 wherein the network is one of a Local Area  
2     network (LAN) and a Wide Area Network (WAN).

1           79.     The system of claim 61 wherein the network is a network indicating a  
2     type of a connection.

1           80.     The system of claim 79 where the type is one of a Dense Wavelength  
2     Division Multiplexing (WDM), a Asynchronous Transfer Mode (ATM), an Ethernet,  
3     and a dial up modem.

ABSTRACT

A receiver receives information. A selector couples to the receiver to select a server based on the received information. A transmitter couples to the selector to transmit a multimedia stream from the selected server to a viewer via a network.

006260-95757960

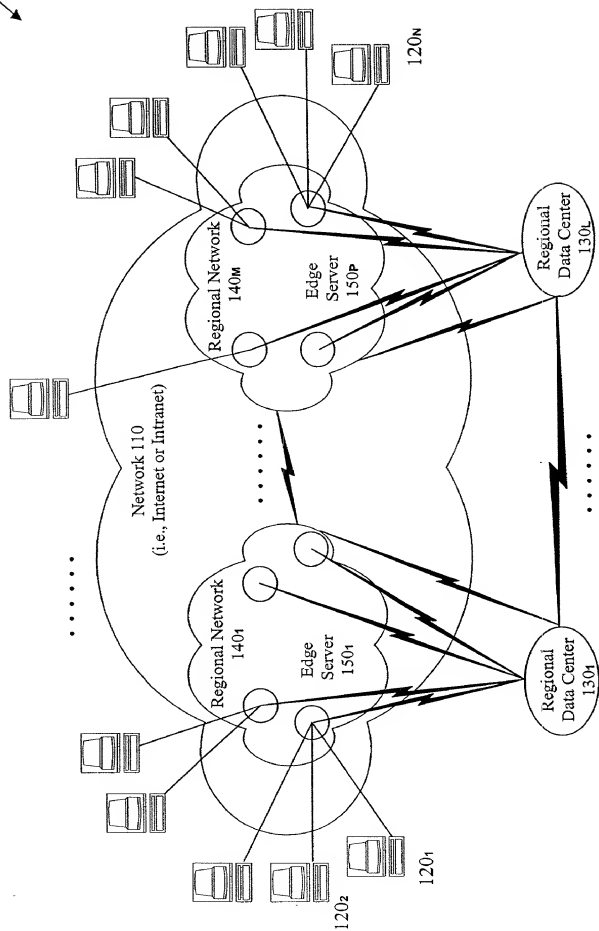


Fig. 1A

Private/Public Connection

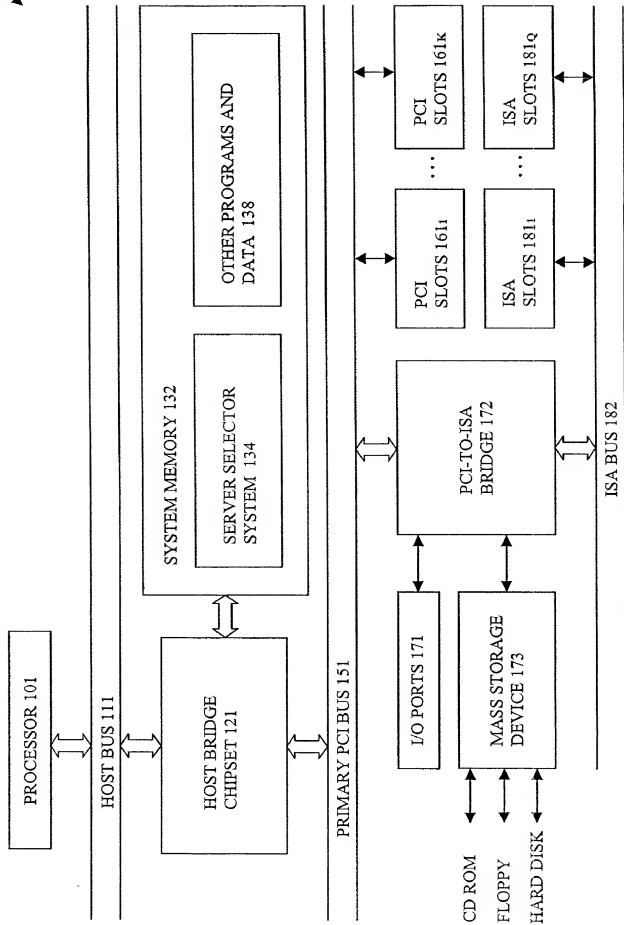


Fig. 1B

000000-55252960

100C

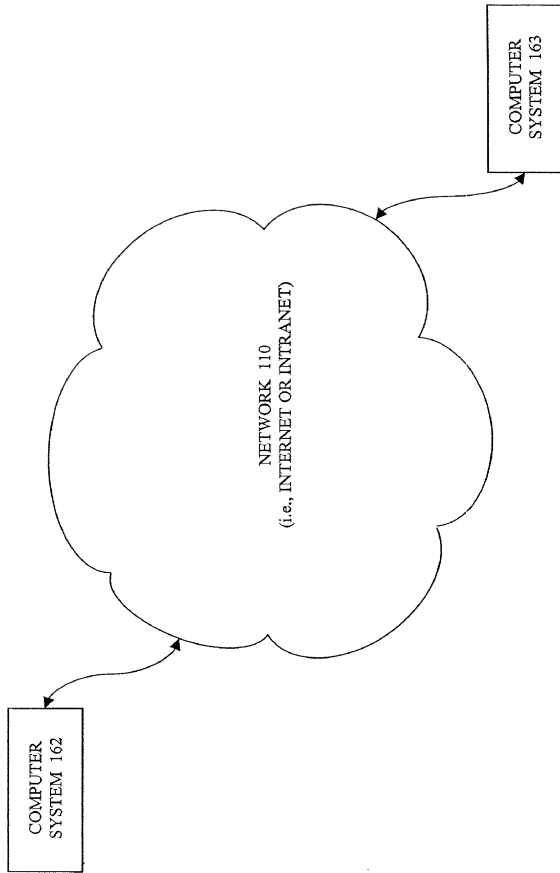


Fig. 1C



Fig. 2



000000-95252960

134

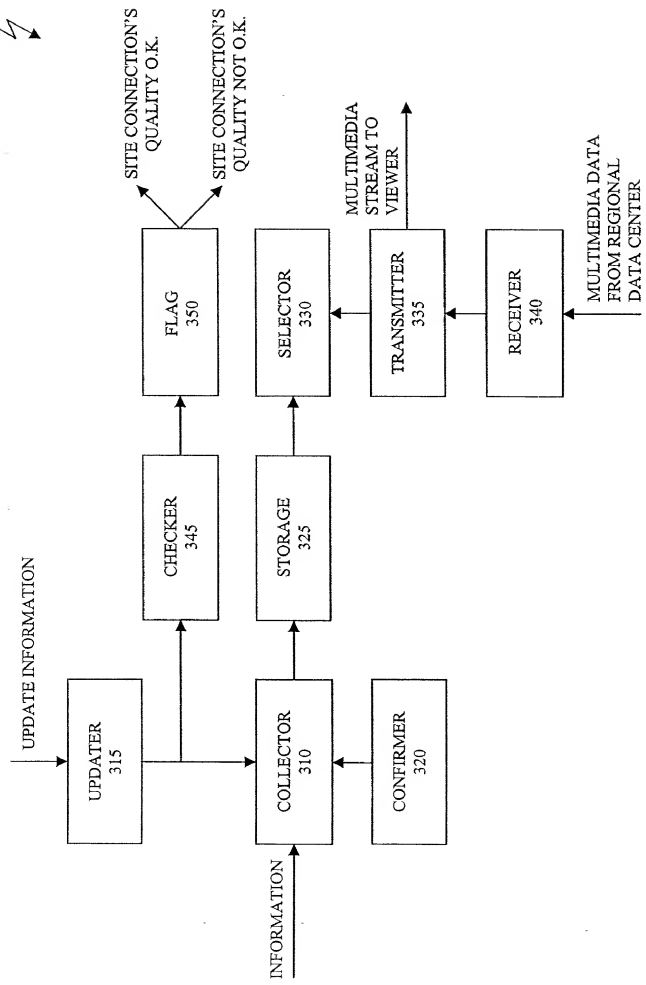


Fig. 3

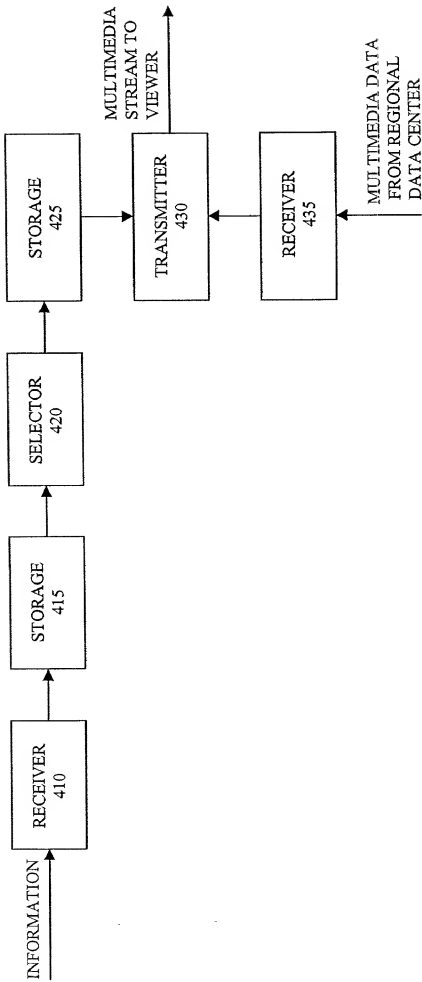


Fig. 4

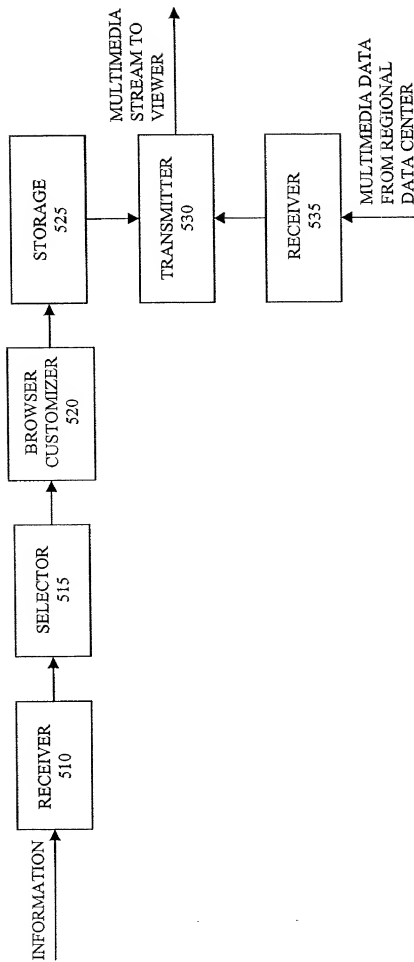


Fig. 5

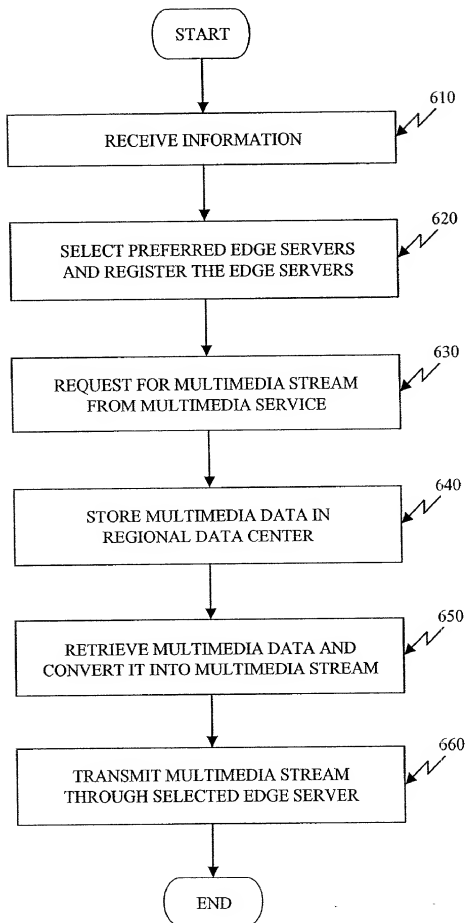


Fig. 6

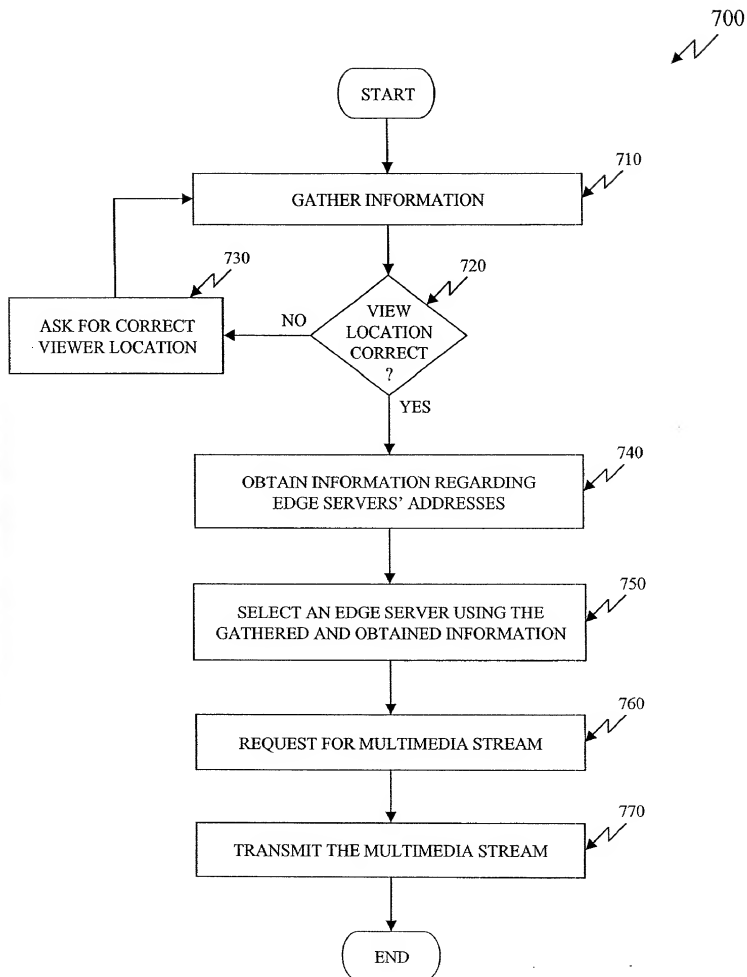


Fig. 7

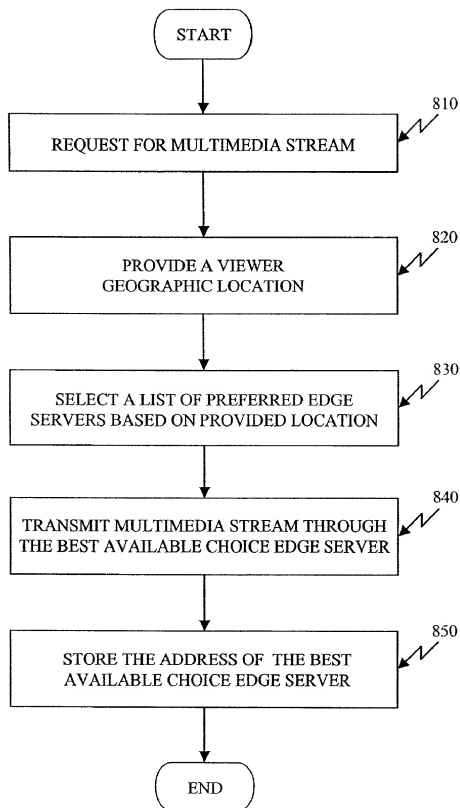


Fig. 8

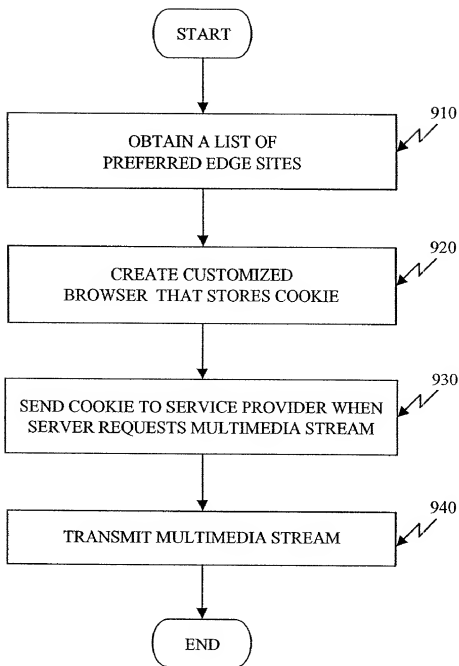


Fig. 9

# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION (FOR INTEL CORPORATION PATENT APPLICATIONS)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

## METHOD AND APPARATUS FOR SELECTING SERVER TO DISTRIBUTE MULTIMEDIA DATA VIA A NETWORK

the specification of which



is attached hereto.

was filed on \_\_\_\_\_ as

United States Application Number \_\_\_\_\_

or PCT International Application Number \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

### Prior Foreign Application(s):

APPLICATION NUMBER	COUNTRY (OR INDICATE IF PCT)	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
			<input type="checkbox"/> No <input type="checkbox"/> Yes
			<input type="checkbox"/> No <input type="checkbox"/> Yes
			<input type="checkbox"/> No <input type="checkbox"/> Yes

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

APPLICATION NUMBER	FILING DATE



I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NUMBER	FILING DATE	STATUS (ISSUED, PENDING, ABANDONED)

I hereby appoint the persons listed on Appendix A hereto (which is incorporated by reference and a part of this document) as my respective patent attorneys and patent agents, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to:

William W. Schaal, Reg. No. 39,018, BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN, LLP

(Name of Attorney or Agent)

12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025 and direct telephone calls to:

William W. Schaal, (714) 557-3800.

(Name of Attorney or Agent)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor (given name, family name)

Andrew J. Kuzma

Inventor's Signature

*Andrew J. Kuzma*

Date

20 SEP 00

Residence Portland, Oregon USA

Citizenship USA

(City, State)

(Country)

P. O. Address 12558 NW Woodland Court

Portland, Oregon 97229 USA

## APPENDIX A

I hereby appoint BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, a firm including: William B. Alford, Reg. No. 37,764; Farzad E. Aminai, Reg. No. 42,261; William Thomas Babbitt, Reg. No. 39,591; Carol F. Barry, Reg. No. 41,600; Jordan Michael Becker, Reg. No. 39,602; Lisa N. Benado, Reg. No. 39,995; Bradley J. Berezak, Reg. No. 33,474; Michael A. Bernadicon, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; R. Alan Burnett, Reg. No. 46,149; Gregory D. Caldwell, Reg. No. 39,926; Andrew C. Chen, Reg. No. 43,544; Thomas M. Coester, Reg. No. 39,637; Donna Jo Coningsby, Reg. No. 41,684; Dennis M. deGuzman, Reg. No. 41,702; Stephen M. De Klerk, Reg. No. P46,503; Michael Anthony DeSanctis, Reg. No. 39,957; Daniel M. De Vos, Reg. No. 37,813; Sanjeet Dutta, Reg. No. P46,145; Matthew C. Fagan, Reg. No. 37,542; Tarek N. Fahmi, Reg. No. 41,402; George Fountain, Reg. No. 36,374; Paramita Ghosh, Reg. No. 42,806; James Y. Go, Reg. No. 40,621; James A. Henry, Reg. No. 41,064; Willmore F. Holbrow III, Reg. No. P41,845; Sheryl Sue Holloway, Reg. No. 37,850; George W. Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; William W. Kidd, Reg. No. 31,772; Sang Hui Kim, Reg. No. 40,450; Walter T. Kim, Reg. No. 42,731; Eric T. King, Reg. No. 44,188; Erica W. Kuo, Reg. No. 42,775; George B. Leavell, Reg. No. 45,436; Gordon R. Lindeen III, Reg. No. 33,192; Van Carol Little, Reg. No. 41,181; Kurt P. Leyendecker, Reg. No. 42,799; Joseph Lutz, Reg. No. 43,765; Michael J. Mallie, Reg. No. 36,591; Andre L. Marais, under 37 C.F.R. § 10.9(b); Paul A. Mendonsa, Reg. No. 42,879; Clive D. Menezes, Reg. No. 45,493; Chun M. Ng, Reg. No. 36,878; Thien T. Nguyen, Reg. No. 43,833; Thinh V. Nguyen, Reg. No. 42,034; Dennis A. Nicholls, Reg. No. 42,036; Daniel E. Ovanezian, Reg. No. 41,236; Kenneth B. Paley, Reg. No. 38,989; Marina Portnova, Reg. No. P45,750; William F. Ryann, Reg. 44,313; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. 39,018; James C. Scheller, Reg. No. 31,195; Jeffrey Sam Smith, Reg. No. 39,377; Maria McCormack Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Judith A. Szepesi, Reg. No. 39,393; Vincent P. Tassinari, Reg. No. 42,179; Edwin H. Taylor, Reg. No. 25,129; John F. Travis, Reg. No. 43,203; Joseph A. Twarowski, Reg. No. 42,191; Thomas A. Van Zandt, Reg. No. 43,219; Lester J. Vincent, Reg. No. 31,460; Glenn E. Von Tersch, Reg. No. 41,364; John Patrick Ward, Reg. No. 40,216; Mark L. Watson, Reg. No. P46,322; Thomas C. Webster, Reg. No. P46,154; and Norman Zafman, Reg. No. 26,250; my patent attorneys, and Fimasat Ali, Reg. No. 45,715; and Justin M. Dillon, Reg. No. 42,486; Raul Martinez, Reg. No. 46,904; my patent agents, of BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90023, telephone (714) 557-3800, and Alan K. Aldous, Reg. No. 31,905; Robert D. Anderson, Reg. No. 33,826; Joseph R. Bond, Reg. No. 36,458; Richard C. Calderwood, Reg. No. 35,468; Jeffrey S. Draeger, Reg. No. 41,000; Cynthia Thomas Featz, Reg. No. 39,973; Sean Fitzgerald, Reg. No. 32,027; John N. Greaves, Reg. No. 40,362; Seth Z. Kelson, Reg. No. 40,670; David J. Kaplan, Reg. No. 41,105; Charles A. Mirbo, Reg. No. 41,199; Leo V. Novakoski, Reg. No. 37,198; Naomi Obinata, Reg. No. 39,320; Thomas C. Reynolds, Reg. No. 32,488; Kenneth M. Seddon, Reg. No. 43,105; Mark Seeley, Reg. No. 32,299; Steven P. Skabrat, Reg. No. 36,279; Howard A. Skaist, Reg. No. 36,008; Steven C. Stewart, Reg. No. 33,555; Raymond J. Werner, Reg. No. 34,752; Robert G. Winkle, Reg. No. 37,474; and Charles K. Young, Reg. No. 39,435; my patent attorneys, and Thomas Raleigh Lane, Reg. No. 42,781; Calvin B. Wells, Reg. No. P43,256; Peter Lam, Reg. No. 44,855; Gene I. Su, Reg. No. 45,140; and Steven D. Yates, Reg. No. 42,242, my patent agents, of INTEL CORPORATION; and James R. Thein, Reg. No. 31,710, my patent attorney; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.